




### Door Mounted Handle (HP)

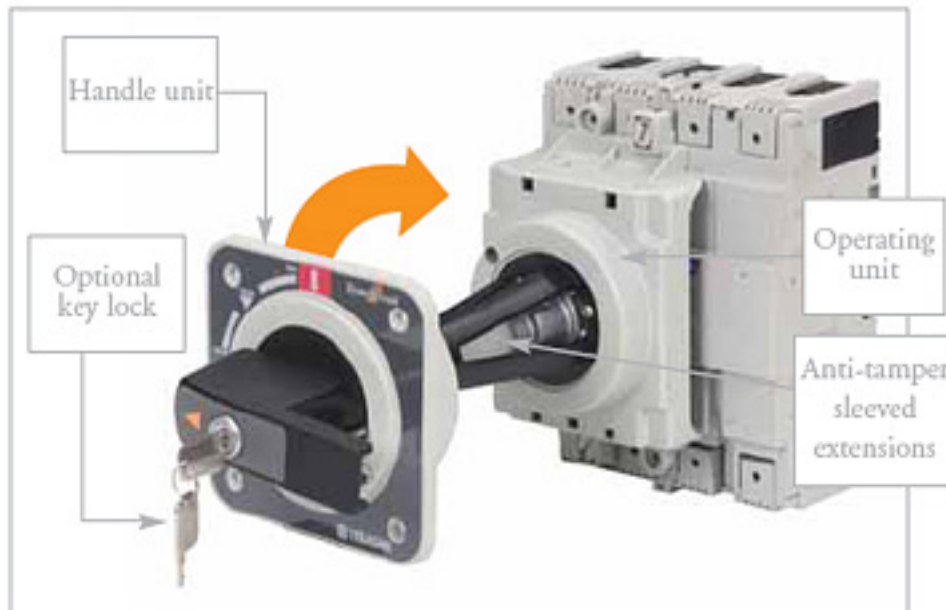

*Door Mounted Handle with Optional Keylock*

The door mounted handle is used to operate a circuit breaker mounted inside a cubicle from outside the door. It consists of an operating mechanism that is mounted on the breaker, an operating handle that is mounted on the door, and a shaft that transmits the turning force from the handle to the operating unit. The shaft can be cut to the required length.

### Breaker Mounted Handle (HB)



*Breaker Mounted Handle Padlocked in the OFF Position*

This external operating handle is used to operate a circuit breaker mounted just behind a compartment door with the door closed. The operating unit and handle itself are mounted directly on the circuit breaker. The handle protrudes through a cutout in the door. A mounting door flange is supplied with the external operating handle which covers the cutout from the front.

Padlocking and keylocking is possible in the OFF position.

### Locking Devices

Toggle locking devices allow MCCBs to be locked ON or OFF using up to three padlocks. Locking devices for 125A, 160A and 250A frame models accept padlocks with 5mm hasp diameter. Locking devices for 400A and 630A frame models accept padlocks with 8mm hasp diameter.



*S250 Locked OFF*



*S400 Locked OFF*

Fittings for Castell and Fortress locks are available. They are suitable for use on toggle-operated MCCBs, or on door mounted handles (HP) for MCCBs.

